

DATE: DEC., 12, 2014

MESSRS. : _____

AGENT: _____

SPECIFICATION
OF
PYROELECTRIC PASSIVE
INFRARED SENSOR

MODEL NO. SBAC10-11-G (極性指定品)

PART NO. _____

PYROELECTRIC PASSIVE INFRARED SENSOR MODEL NO. SBAC10-11-G (極性指定品)	PAGE 1 / 8	DRAWING NO. 1212142	REV : A
	NIPPON CERAMIC CO., LTD.		
APPROVED BY	CHECKED BY	DRAWN BY	

ELECTRICAL CHARACTERISTICS (AT 25 ± 5 °C)

- 1) CIRCUIT CONFIGURATION : THREE-TERMINAL SENSOR WITH SOURCE FOLLOWER
SEE FIGURE 2
- 2) OPERATING VOLTAGE : 3.0 ~ 10 V DC (Rs: 47K Ω)
- 3) SOURCE VOLTAGE : 0.4 ~ 1.5 V (VD: 5V, Rs: 47K Ω)
- 4) SIGNAL OUTPUT MIN. 2.0 Vp-p (TYP. 3.2 Vp-p)

SIGNAL OUTPUT IS MEASURED AT CHOPPER FREQUENCY OF 1 Hz WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72.5 dB (AT 1 Hz) AND SUBMITTED TO THE EMISSION OF INFRARED ENERGY OF 13 μ W/cm² FROM 420 K BLACK BODY.
SEE FIGURE 3

- 5) NOISE OUTPUT : MAX. 200 mVp-p (TYP. 70 mVp-p)

NOISE OUTPUT SHALL BE MEASURED FOR 20 SECONDS WHEN CONNECTED TO THE AMPLIFIER OF GAIN 72.5 dB AND SHUT OUT FROM INFRARED ENERGY.
SEE FIGURE 3

- 6) FREQUENCY RESPONSE : 0.3 Hz TO 3.0 Hz / 12 dB MAX.
- 7) ELEMENT POLARITY : WHEN THE HEAT ENERGY OF $\Delta T > 0$ COME INTO THE ELEMENT, SIGNAL POLARITY OF PYRO ITSELF SHALL BE MINUS.

OPTICAL CHARACTERISTICS

- 1) FIELD OF VIEW : 115° FROM CENTER OF SENSITIVE ELEMENT
: SEE FIGURE 1-A
- 2) FILTER SUBSTRATE : SILICON
- 3) CUT ON (5 %T ABS) : 5.0 ± 0.5 μ m
- 4) TRANSMISSION : ≥ 70 % AVERAGE 7~14 μ m


MODEL NO. : SBAC10-11-G (極性指定品)	PAGE	DRAWING NO.	REV :
	3 / 8	1212142	A
PART NO. :	NIPPON CERAMIC CO., LTD.		

ENVIRONMENTAL REQUIREMENTS

- 1) OPERATING TEMPERATURE : -20 °C TO +70 °C
- 2) STORAGE TEMPERATURE : -30 °C TO +80 °C
- 3) RELATIVE HUMIDITY :
THE SENSOR SHALL OPERATE WITHOUT INCREASE IN NOISE OUTPUT WHEN EXPOSED TO 90 ~ 95 % RH AT 30 °C CONTINUOUSLY.
- 4) HERMETIC SEAL :
THE SENSOR SHALL BE SEALED TO WITHSTAND A VACUUM OF 21.28 kPa.


RoHS COMPLIANCE

THIS PRODUCT CONFORMS TO THE RoHS DIRECTIVE IN FORCE AT THE DATE OF ISSUANCE OF THIS SPECIFICATION SHEET.


MODEL NO. : SBAC10-11-G (極性指定品)	PAGE	DRAWING NO.	REV :
	4 / 8	1212142	A
PART NO. :	 NIPPON CERAMIC CO., LTD.		

CONFIGURATION (FIGURE 1)


FIELD OF VIEW
(FIGURE 1-A)




TOP VIEW
(FIGURE 1-B)

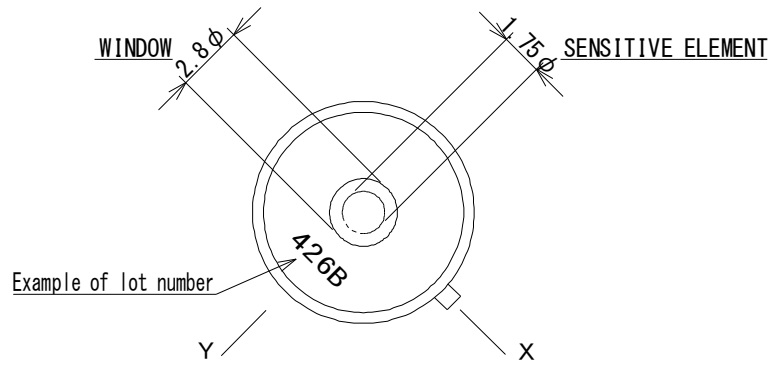

SIDE VIEW
(FIGURE 1-C)

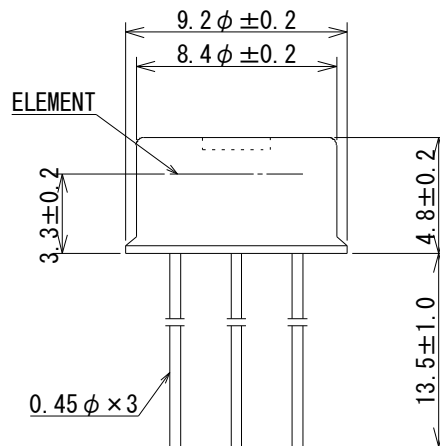

BASE VIEW
(FIGURE 1-D)

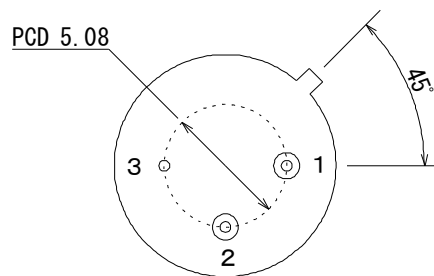

- 1: DRAIN
- 2: SOURCE
- 3: GROUND

UNIT : mm

MODEL NO. : SBAC10-11-G (極性指定品)

PART NO. :


PAGE
5 / 8

DRAWING NO.
1212142

REV :
A


☐ NIPPON CERAMIC CO., LTD.

CIRCUIT CONFIGURATION (FIGURE 2)

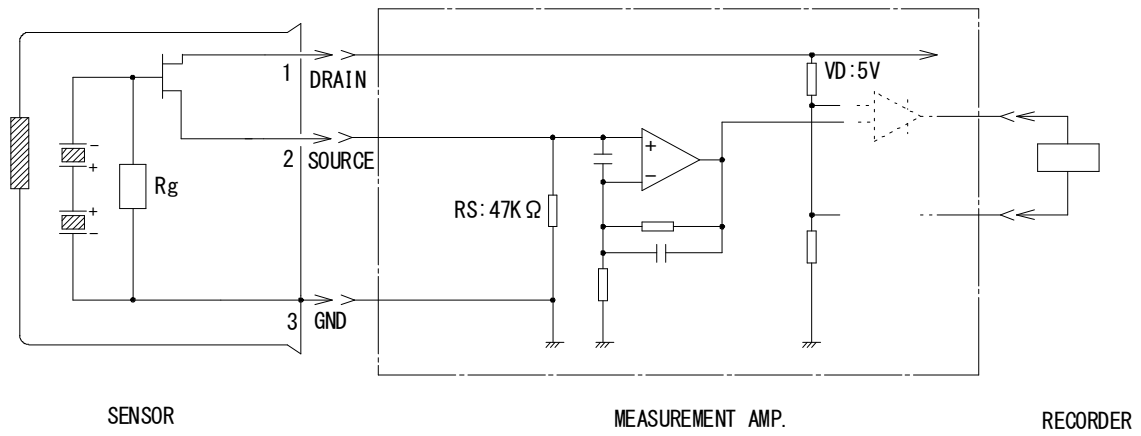


※ MEASUREMENT AMP.: NON-INVERTED TYPE, GAIN 72.5 dB AT 1 Hz 0.4~2.7 Hz / -3 dB

TEST SET-UP BLOCK DIAGRAM (FIGURE 3)

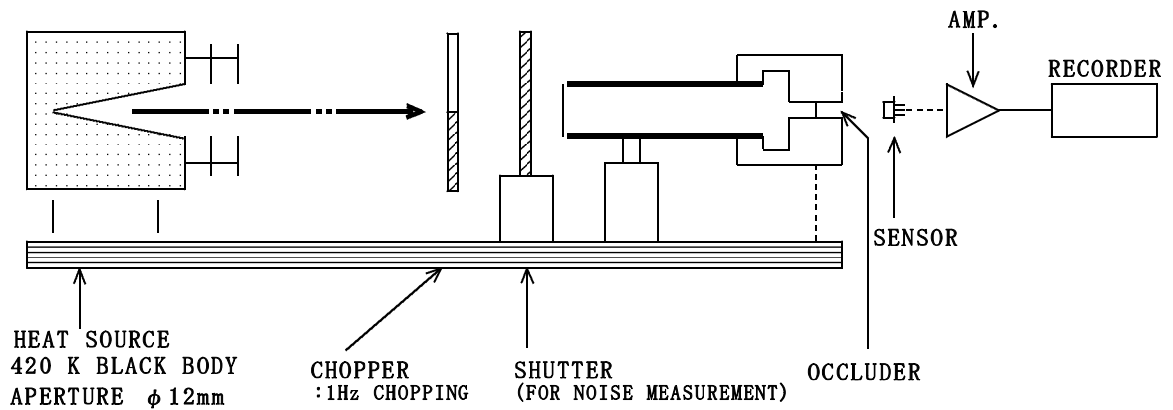

OCCLUDER POSITION

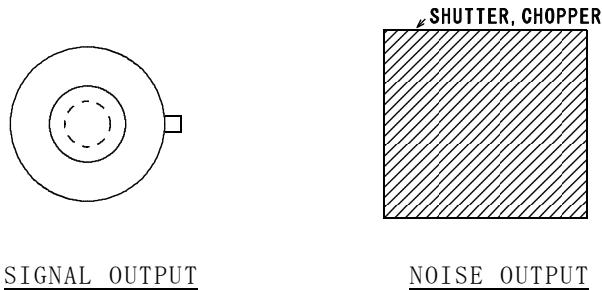

MODEL NO. : SBAC10-11-G (極性指定品)

PART NO. :

PAGE
6 / 8

DRAWING NO.
1212142

REV :
A

© NIPPON CERAMIC CO., LTD.

※ NOTES

1. DESIGN RESTRICTIONS/PRECAUTIONS

IF USED FOR OUTDOOR APPLICATIONS, BE SURE TO APPLY SUITABLE SUPPLEMENTARY OPTICAL FILTER AND DRIP-PROOF, ANTI-DEW CONSTRUCTION. THIS SENSOR IS DESIGNED FOR INDOOR USE.

IN CASES WHERE SECONDARY ACCIDENTS DUE TO OPERATION FAILURE OR MALFUNCTIONS CAN BE ANTICIPATED, ADD A FAIL SAFE FUNCTION TO THE DESIGN.

2. USAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE OR ANY DETERIORATION OF ITS CHARACTERISTICS, DO NOT USE THIS SENSOR IN THE FOLLOWING, OR SIMILAR, CONDITIONS.

- A. IN RAPID ENVIRONMENTAL TEMPERATURE CHANGES.
- B. IN STRONG SHOCK OR VIBRATION.
- C. IN A PLACE WHERE THERE ARE OBSTRUCTING MATERIALS (GLASS, FOG, ETC.) THROUGH WHICH INFRARED RAYS CANNOT PASS WITHIN DETECTION AREA.
- D. IN FLUID, CORROSIVE GASES AND SEA BREEZE.
- E. CONTINUAL USE IN HIGH HUMIDITY ATMOSPHERE.
- F. EXPOSED TO DIRECT SUN LIGHT OR HEADLIGHTS OF AUTOMOBILES.
- G. EXPOSED TO DIRECT WIND FROM A HEATER OR AIR CONDITIONER.

3. ASSEMBLY RESTRICTIONS/PRECAUTIONS

SOLDERING -----

- A. USE SOLDERING IRONS WHEN SOLDERING.
- B. AVOID KEEPING PINS OF THIS SENSOR HOT FOR A LONG TIME AS EXCESSIVE HEAT MAY CAUSE DETERIORATION OF ITS QUALITY. (E.G. WITHIN 5 SEC. AT 350 °C)

WASHING -----

- A. BE SURE TO WASH OUT ALL FLUX AFTER SOLDERING AS REMAINDER MAY CAUSE MALFUNCTIONS.
- B. USE A BRUSH WHEN WASHING. WASHING WITH AN ULTRASONIC CLEANER MAY CAUSE OPERATIONAL FAILURE.

4. HANDLING AND STORAGE RESTRICTIONS/PRECAUTIONS

TO PREVENT SENSOR MALFUNCTIONS, OPERATIONAL FAILURE, APPEARANCE DAMAGE OR ANY DETERIORATION OF ITS CHARACTERISTICS, DO NOT EXPOSE THIS SENSOR TO THE FOLLOWING OR SIMILAR, HANDLING AND STORAGE CONDITIONS.


- A. VIBRATION FOR A LONG TIME.
- B. STRONG SHOCK.
- C. STATIC ELECTRICITY OR STRONG ELECTROMAGNETIC WAVES.
- D. HIGH TEMPERATURE AND HUMIDITY FOR A LONG TIME.
- E. CORROSIVE GASES OR SEA BREEZE.
- F. DIRTY AND DUSTY ENVIRONMENTS THAT MAY CONTAMINATE THE OPTICAL WINDOW.

MODEL NO. : SBAC10-11-G (極性指定品)	PAGE	DRAWING NO.	REV :
	7 / 8	1212142	A
PART NO. :	NIPPON CERAMIC CO., LTD.		

5. RESTRICTIONS ON PRODUCT USE

THE PRODUCT DESCRIBED IN THIS DOCUMENT SHALL NOT BE USED OR EMBEDDED TO ANY DOWNSTREAM PRODUCTS OF WHICH MANUFACTURE, USE AND/OR SALES ARE PROHIBITED UNDER ANY APPLICABLE LAWS AND REGULATIONS.

SENSOR TROUBLES RESULTING FROM MISUSE, INAPPROPRIATE HANDLING OR STORAGE ARE NOT THE MANUFACTURER'S RESPONSIBILITY.

MODEL NO. : SBAC10-11-G (極性指定品) PART NO. :	PAGE 8 / 8	DRAWING NO. 1212142	REV : A
	 NIPPON CERAMIC CO., LTD.		